

Built for Your



Industry




(a subsidiary of Bright Coop, Inc.)

built the way you want it for the way you use it!

Transporter Drop Deck Platform

Model: VDH48102T

Weight 12,000 lbs. Plus or Minus 3%

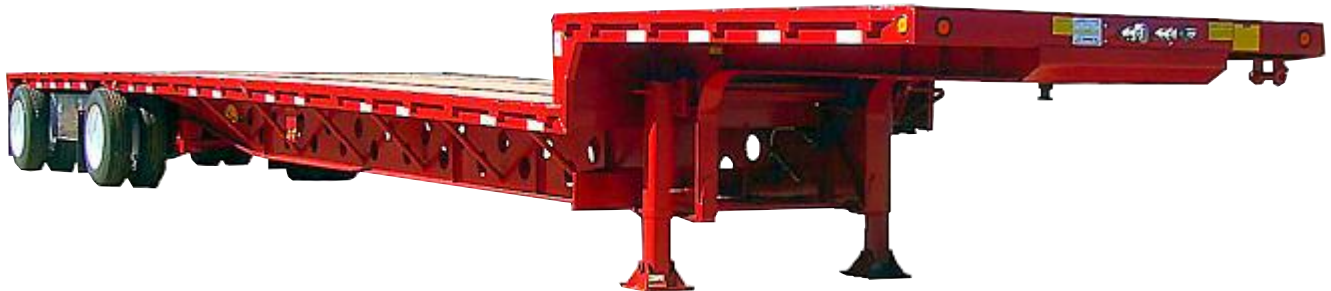

The Viking Specialized "Transporter" Drop Deck highway trailer provides fleet and owner operators alike a very high quality, affordable over the road drop deck trailer combining weight saving frames and high GVWR for the best of both worlds. Built by East Texas Craftsmen in Nacogdoches Texas, you can't beat the quality and price of a Viking Specialized Trailer! This trailer has proven itself as a 1st choice for transporting equipment and materials from state to state, city to city, or job to job. Capacity: 80,000 lb. GVWR.



Built for Your



Industry




(a subsidiary of Bright Coop, Inc.)

built the way you want it for the way you use it!

Transporter Drop Deck Platform

Model: VDH48102T

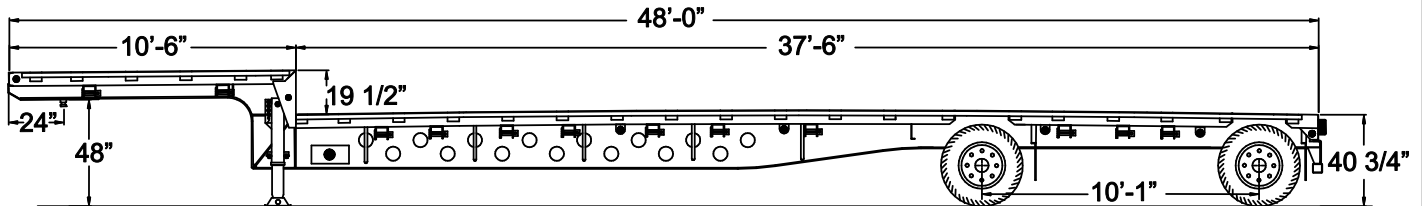

102" Wide Weight 12,000 lbs. Plus or Minus 3% Capacity: 80,000 lb. GVWR

Features:

- Mainframe..... 24" Fabricated main beams with 2" camber, 1/2" x 5" top and bottom flange, 5/8" x 5" bottom flange in the neck, 3/16" web welded on both sides with weight reduction holes. All flange and web material is high strength steel.
- Crossmembers... 4" x 3.2# Jr. I beam on 16" centers with single coil package.
- Kingpin..... 2" SAE kingpin, 1/4" kingpin plate, 24" kingpin setting (standard).
- Siderails..... 6" x 8.2# Structural channel with stake pockets on 24" centers. One spool between each pocket with 1/4" x 2" rubrail.
- Suspension..... (2) Hendrickson® INTRAAX AAL 25K unitized air ride suspension (dump valve included on rear axle).
- Axles..... (2) 25,000 Lb. 5-3/4" round (included with suspension).
- Brakes 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle.
- Wheels..... 8.25 x 22.5, Steel 10 hole disc, hub piloted (color: white).
- Tires..... 255/70R x 22.5 Radials.
- Landing gear..... 2 Speed gear, 62,500 lb. lift capacity; 200,000 lb. static capacity (standard).
- Finish..... Shotblasted, epoxy primed and painted with a high solid polyurethane paint. Colors: black or red (standard) optional colors available.
- Floor..... 1-1/8" Shiplap apitong (standard), 1/4" smooth plate located over the wheel wells.
- Lights..... 7-Way main receptacle, sealed wiring harness with 3 red (tail / stop / turn) rubber mounted LED lights with a 3 light center cluster, 5 clearance lights per side including mid-turn.
- Tandem..... 10' 1" Spread axle set from the rear of the trailer (Optional settings available).
- Tiedowns..... (12) Sliding winches on winch track, (2) on upper deck, (10) on lower deck, located on the roadside.
- Rear bumper..... DOT certified rear under ride guard/bumper with high visibility reflective conspicuity tape and rubber dock bumpers.

Options:

- Spring or air ride slider
- Spring suspension
- Spare tire carrier
- 18" x 18" x 60" Aluminum Tool box
- 48" Front bulkhead
- Longer and shorter lengths
- Front and rear stake pockets
- Aluminum wheels

Viking Specialized Trailers, L.L.C.
1730 S.W. Stalling Dr., Suite 101
Nacogdoches, Texas 75964
(936) 564-8370 (844) 815-6210
Fax (936) 205-9171
www.vikingspztrailers.com