

Built for Your



Industry




(a subsidiary of Bright Coop, Inc.)

built the way you want it for the way you use it!

55 Ton "Hyd-Detachable Neck"

Model: VLD52102-3-55T Weight 23,020 lbs. Plus or Minus 3%

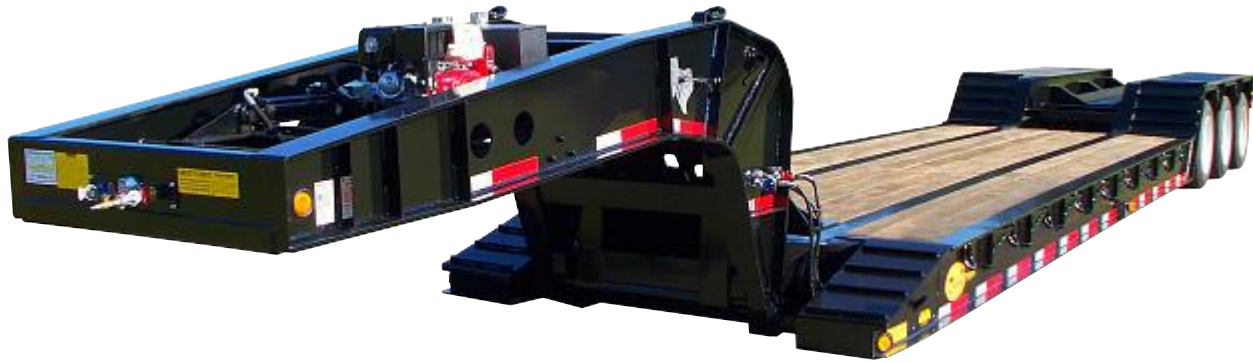

Viking's Hydraulic "Detach" trailer is a real workhorse designed for heavy hauling and simplicity of operation. Two 8" hydraulic rams provide plenty of lift capacity coupled with the power & speed of the 11hp Honda® Engine/pump located in the neck. Fixed front ramps and a heavy 4 beam frame give you lots of strength and a carefree long life. Whether you haul construction equipment or any other drive on load, The Viking "Detach" is the trailer for you. Capacity: 135,000 lb. GVWR.






(a subsidiary of Bright Coop, Inc.)

built the way you want it for the way you use it!

55 Ton "Hyd-Detachable Neck"

Model: VLD52102-3-55T

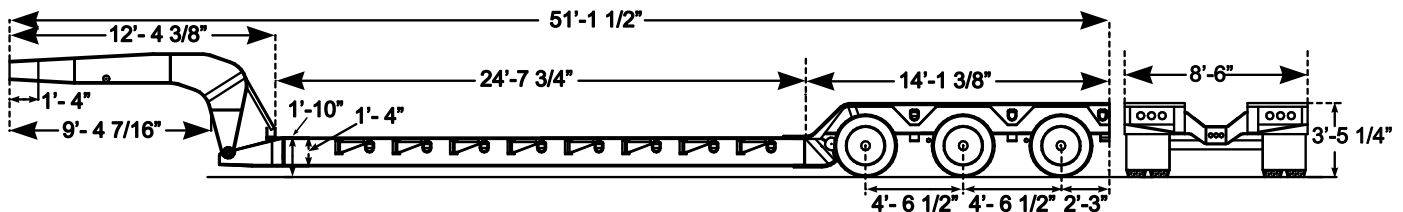

102" Wide Weight 23,020 lbs. Plus or Minus 3% Capacity: 135,000 lb. GVWR

Features:

- Mainframe..... (4) 16" Fabricated main beams with 2" camber, 3/4" x 6" top and bottom flange, 1/4" web welded on both sides. All flange and web material is high strength steel.
- Crossmembers... 8" x 6.5# I beam on 16" centers.
- Kingpin..... 2" SAE kingpin, 3/8" kingpin plate, 97" swing clearance, 16" kingpin setting.
- Siderails..... (2) 16" Fabricated beams, 1/2" x 6" top and bottom flange, 1/4" web welded on both sides.
- Suspension..... Hendrickson® HT250US air ride suspension with manual dump valve.
- Axles (3) 25,000 Lb., 5" round, 5/8" wall.
- Brakes..... 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle.
- Wheels..... 8.25 x 22.5, Steel 10 hole disc, hub piloted (color: white).
- Tires..... 255/70R x 22.5 Radials.
- Finish..... Shotblasted and painted with a high solid polyurethane paint. Color: black (standard).
- Floor..... 2" Nominal oak with 1/4" tread plate over suspension.
- Lights..... 7-Way main receptacle, sealed wiring harness, rubber mounted LED lights, (5) light per side including mid-turn.
- Out-riggers..... (16) Total, (8) per side for 12" boards.
- Flag pockets..... (4) Total (2) per side.
- Axle setting..... Center line of suspension set at 81-1/2" from the rear of the trailer with 54-1/2" axle centers.
- Hydraulics..... (2) 8" Hydraulic lift cylinders powered by a 11HP. Honda® engine and pump.
- Ramps..... Fixed front ramps with 1" traction cleats.
- D-rings..... (24) Total (12) per side.

Options:

- Full steel flooring
- 65 Ton 4 axle configuration
- 4th Flip axle
- Epoxy and zinc-rich primer available
- Aluminum wheels

Viking Specialized Trailers, L.L.C.
 1730 S.W. Stalling Dr., Suite 101
 Nacogdoches, Texas 75964
 (936) 564-8370 (844) 815-6210
 Fax (936) 205-9171
www.vikingspztrailers.com