

**Built for Your**



**Industry**



(a subsidiary of Bright Coop, Inc.)

*built the way you want it for the way you use it!*

**Transporter Combo Flat Deck**  
**Weight 12,000 lbs. Plus or Minus 3%**

**Model: VFHC48102T**



The "Transporter Combo Flat" from Viking Specialized Trailers combines the quality and durability that goes into every Viking trailer. Aluminum crossmembers, outriggers, side rail, bulkheads and flooring come together to make our lightest Flat Bed trailer produced. This trailer was designed to last and allow you to haul the most. The Viking Specialized "Transporter Combo Flat" new ideas and innovation at work for you. Capacity: 80,000 lb. GVWR.



# Built for Your



# Industry




(a subsidiary of Bright Coop, Inc.)

*built the way you want it for the way you use it!*

## Transporter Combo Flat Deck

## Model: VFHC48102T

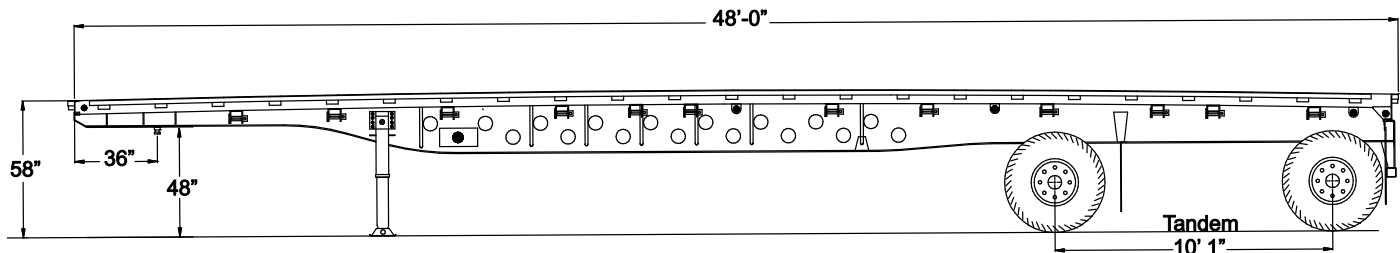

**102" Wide Weight 10,500 lbs. Plus or Minus 3% Capacity: 80,000 lb. GVWR**

### Features:

- Mainframe..... 24" Fabricated main beams with 2" camber, 1/2" x 5" top and bottom flange, 3/16" web welded on both sides with weight reduction holes. All flange and web material is high strength steel.
- Crossmembers... 4" Extruded aluminum I beam on 16" centers with single coil package.
- Kingpin..... 2" SAE kingpin, 1/4" kingpin plate, 36" kingpin setting (standard).
- Siderails..... 6" Extruded aluminum with stake pockets on 24" centers. 3/8" x 3" aluminum rubrail with double pipe spools.
- Suspension..... (2) Hendrickson® INTRAAX AAT 25K unitized air ride suspension (dump valve included on rear axle).
- Axles..... (2) 25,000 Lb., 5-3/4" round (included with suspension).
- Brakes..... 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle.
- Wheels..... 8.25 x 22.5, Aluminum, 10 Hole disc, hub piloted (polished finish on the outside and machine finish on the inside).
- Tires..... 11R x 22.5 Radials
- Landing gear..... 2 Speed gear with 62,500 lb. lift capacity; 200,000 lb. static capacity (standard).
- Finish..... Steel components are shotblasted, epoxy primed & painted with a high solid polyurethane paint. Colors: black or red (standard) optional colors available.
- Floor..... 1-1/4" Extruded aluminum with 4 apitong nailing strips.
- Lights..... 7-Way main receptacle, sealed wiring harness with 3 red (tail / stop / turn) rubber mounted LED lights with a 3 light center cluster, 5 clearance lights per side including mid-turn.
- Tandem..... 10' 1" Spread axle set from the of the trailer (Optional settings available).
- Tiedowns..... (12) Sliding winches on winch track located on the roadside.
- Rear bumper..... DOT certified rear under ride guard/bumper with high visibility reflective conspicuity tape and rubber dock bumpers.

### Options:

- Spring or air ride slider
- Spring suspension
- Spare tire carrier
- 24" x 24" x 60" Aluminum Tool box
- 48" Front bulkhead
- Longer and shorter lengths
- Front and rear stake pockets
- Three wheel lift kit on rear

**Viking Specialized Trailers, L.L.C.**  
1730 S.W. Stalling Dr., Suite 101  
Nacogdoches, Texas 75964  
(936) 564-8370 (844) 815-6210  
Fax (936) 205-9171  
[www.vikingspzdtrailers.com](http://www.vikingspzdtrailers.com)